
9. Wireless / remote control

WiFiFunction



Step1: WIFI connection: The WIFI icon will flash to enter the WIFI connection status after power on.

It means the WIFI is successfully connected if the WIFI icon can be lighted over 5S. You can check the connection status in your mobile APP.

The WIFI icon is not lighted once WIFI connection is failed. Please reconnect following below 2 ways.→

- Method 1: Restart the controller.
- Method 2: Press and simultaneously hold three keys  +  +  for 5 seconds to reset the WIFI module, and then the WIFI icon will be flashed again).

Download and install the software:




User registration


When using the "smart life" software for the first time, user registration is required.

Click the "Create New User" link to enter the registration interface.

If you already have an account, just click login.

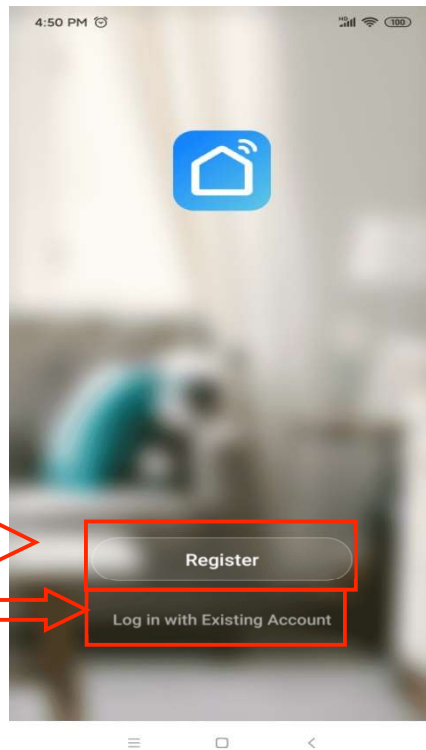

After entering the registration page, please follow the instructions on the page to register.

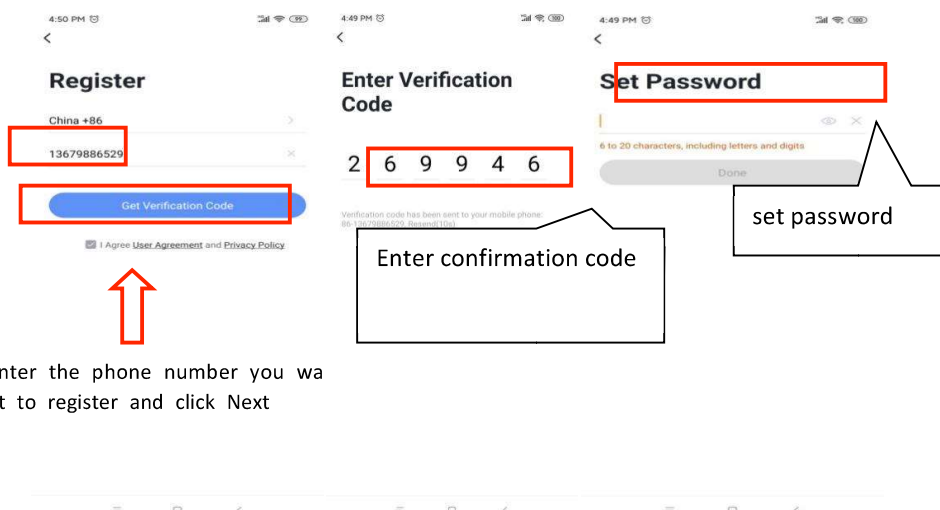

User login

After successful registration, the software will jump to the login interface or directly log in successfully, enter the correct "user name" and "password" to log in.


The screenshot shows a mobile app login interface. At the top, the status bar displays the time 9:07 AM, signal strength, and battery level. Below the status bar is a back arrow icon. The title "Log In" is centered. The form includes a country selection dropdown showing "China +86", a username input field with the placeholder "Please enter your account", and a password input field with the placeholder "Password". A "Log In" button is at the bottom of the form, with a "Forgot Password" link below it. Red arrows point from the text labels on the left to the corresponding form elements. Below the login form, there is a "Social Login" section with icons for WeChat and QQ. At the bottom, there is a checkbox for "I Agree User Agreement and Privacy Policy" and a navigation bar with three icons: a menu icon, a home icon, and a back arrow icon.

Choose the country →

Enter the username →


Enter password →

Click the login button to log in →

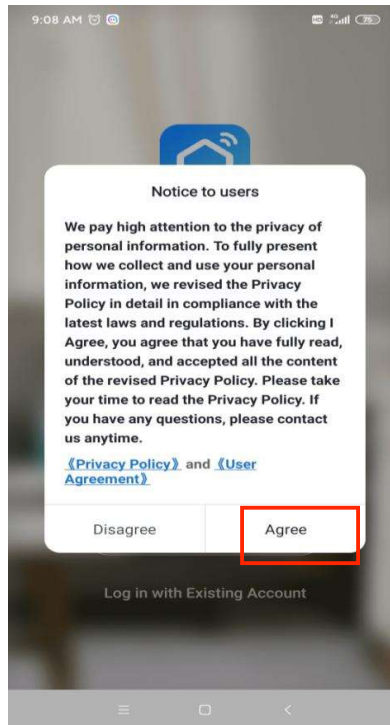

Need to select "Agree"

The phone needs to be connected to the network through the WIFI network

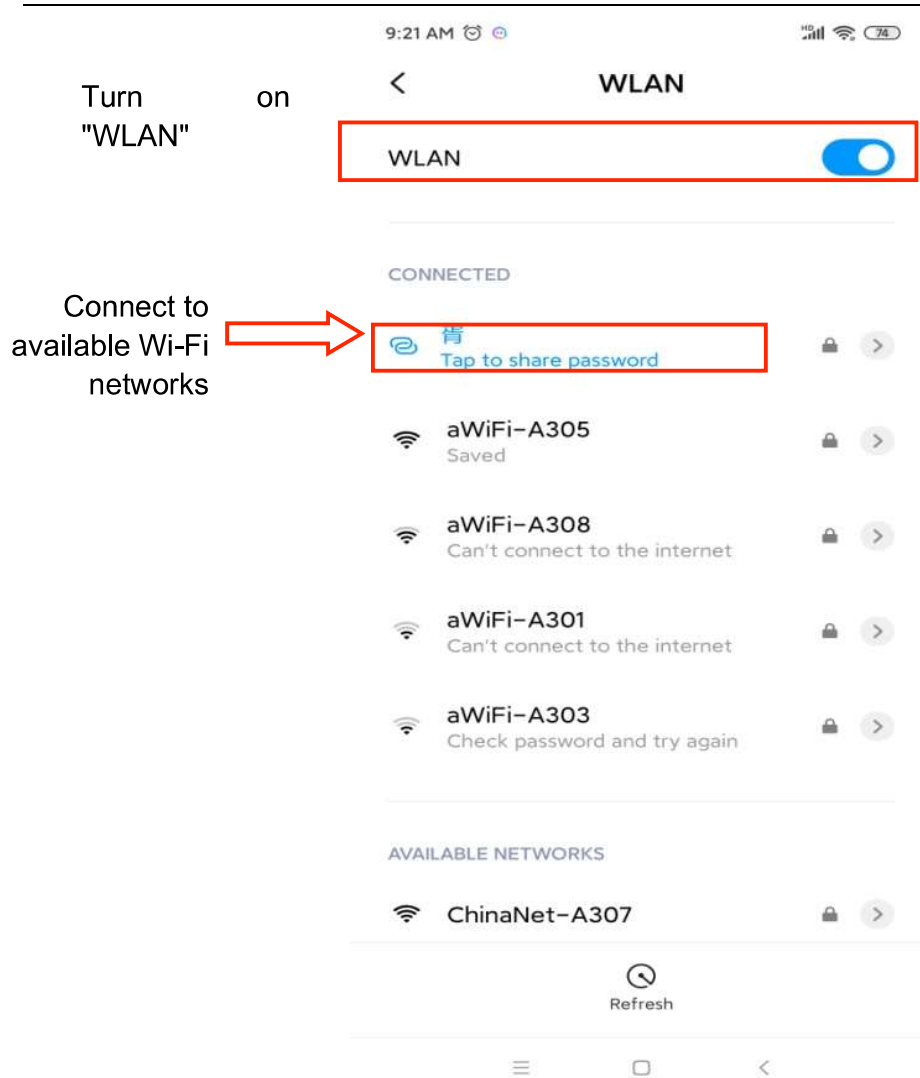



This WIFI is not the WIFI in the module but the WIFI that can be connected to the Internet;

After users log in to the software, they can add devices

Device binding

Click "+" or "Add Device" in the upper right corner to bind.

Click to enter
the "Add Device
Type" interface

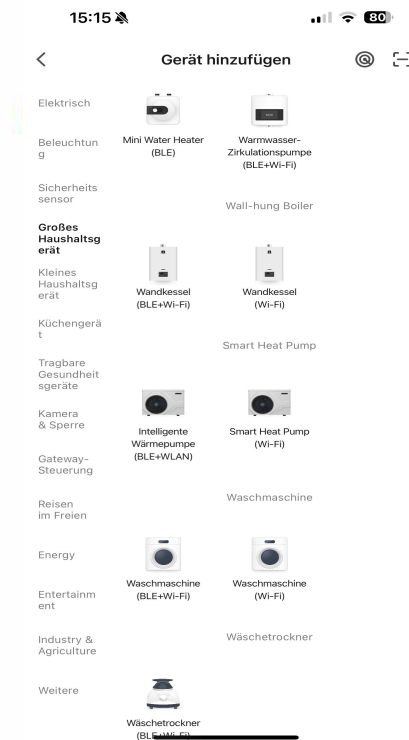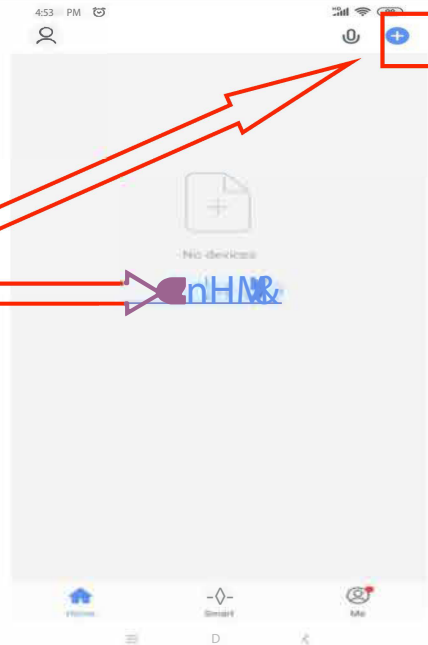


Choose "Smart Heat-
Pump (Wi-Fi)"


After completing the "Select Device Type", enter the "Add Device Interface", and the network configuration methods are divided into "default mode (WI-FI fast connection)" and "compatibility mode (hotspot distribution network)"

Default mode (WI-FI fast connection):

The remote controller simultaneously press the up key + mode key for 3 seconds to enter the "default mode" distribution network

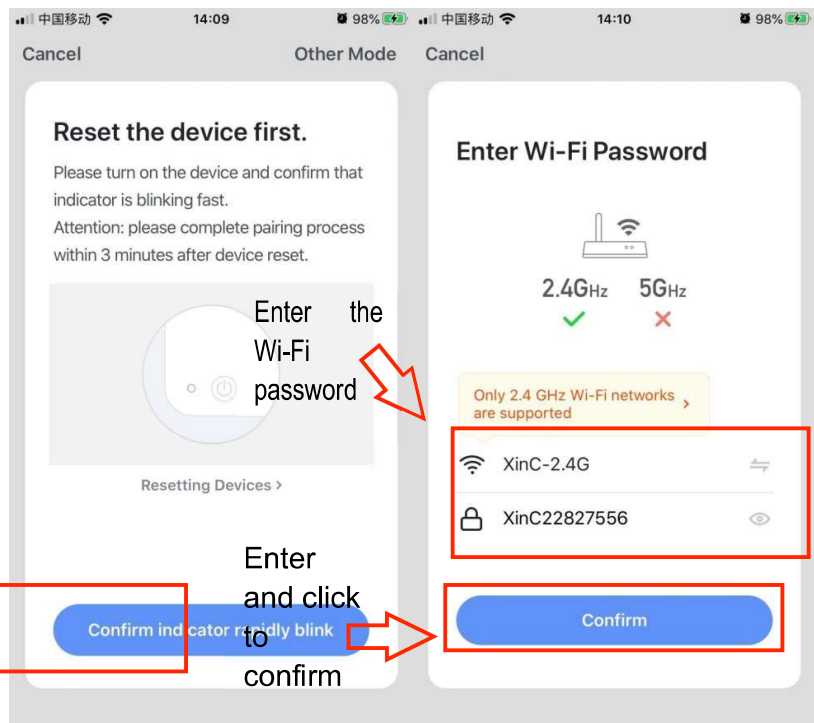

Enter the password and confirm it will jump to the connection interface

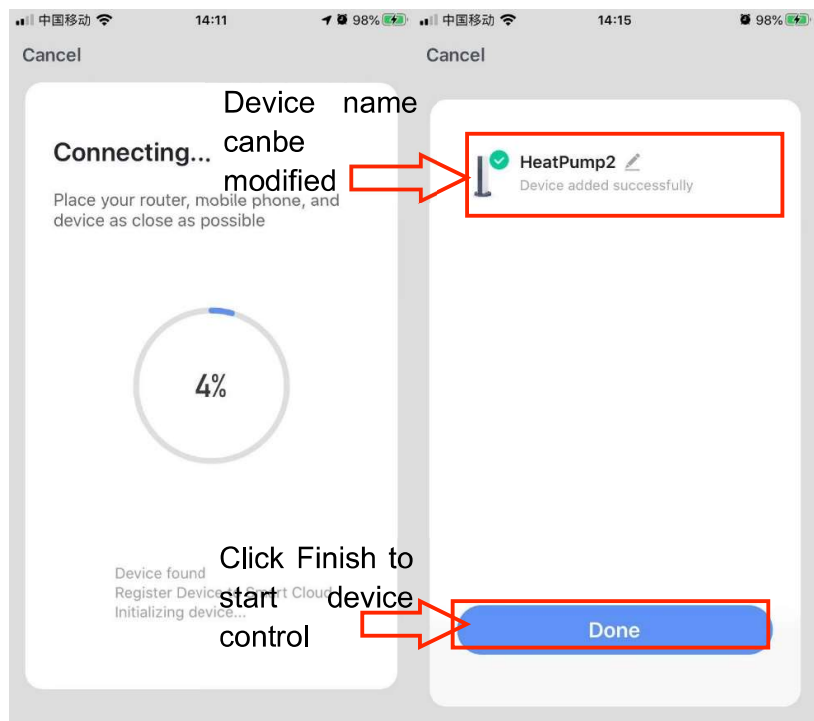

Device not responding
Try "Switch Pairing Mode"

- ① Check if the device has been reset and the indicator is blinking quickly.
- ② Check if it is 2.4 GHz Wi-Fi.
- ③ Verify the Wi-Fi password.

Retry


Switch Pairing Mode

More device-pairing FAQs



If the network distribution fails, the APP will display the page as shown in the figure, you can choose to re-add or view the help.


Compatibility mode:

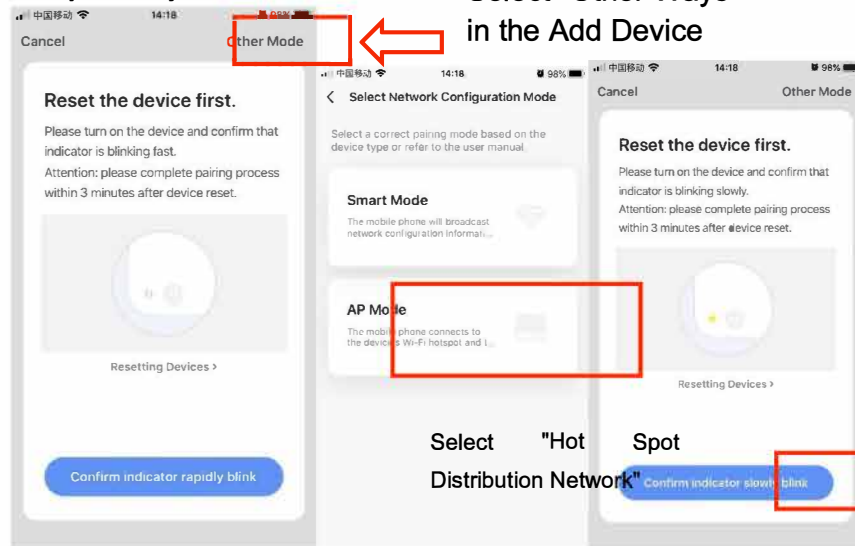


Select "Other Ways"
in the Add Device

Select "Hot Spot
Distribution Network"


Press and hold
the timing key
+,down key
+,power key
simultaneously
for 3 seconds to
enter the
"compatibility
mode"
distribution
network.

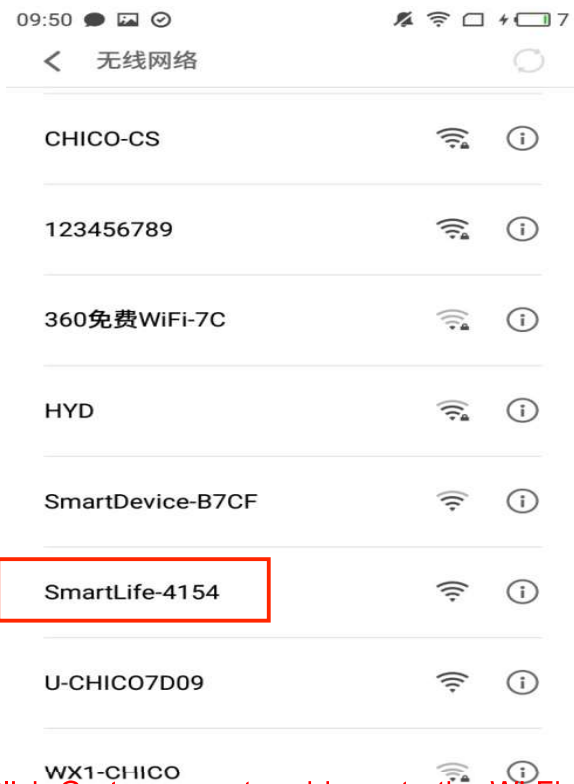

Click Go to connect and jump to the Wi-Fi interface, select Wi-Fi with the words SmartLife-xxxx

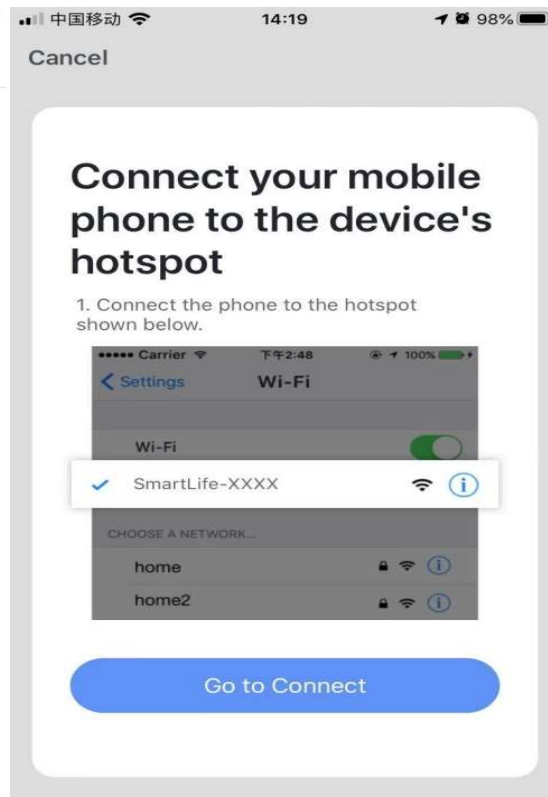


After selecting and connecting, return to the APP interface and enter the network distribution process

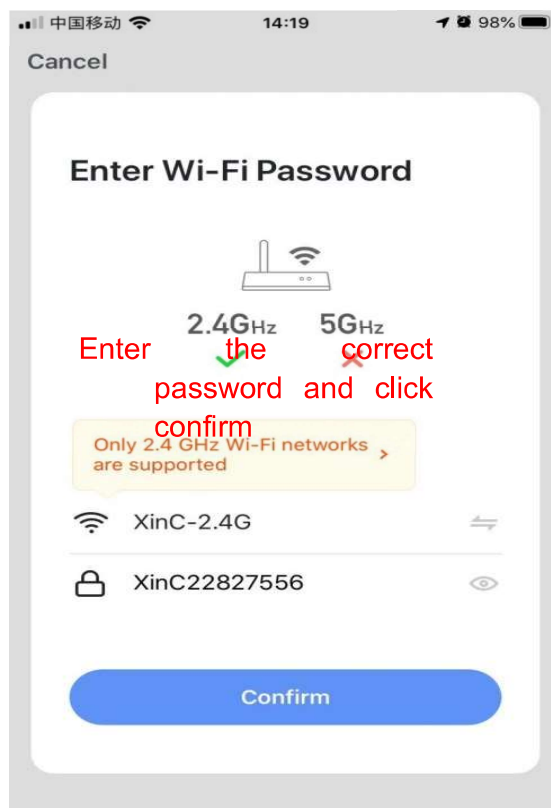

Control introduction

Successfully bound device


Click to enter control

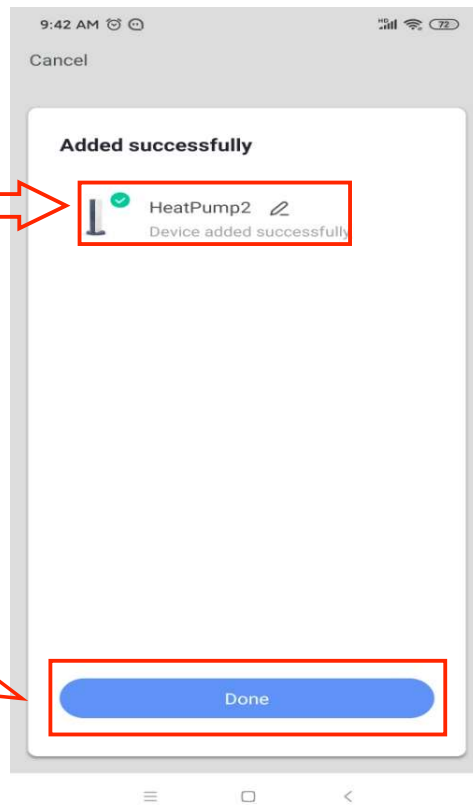

Set temperature, and current inlet water

Set temperature

Switch machine control

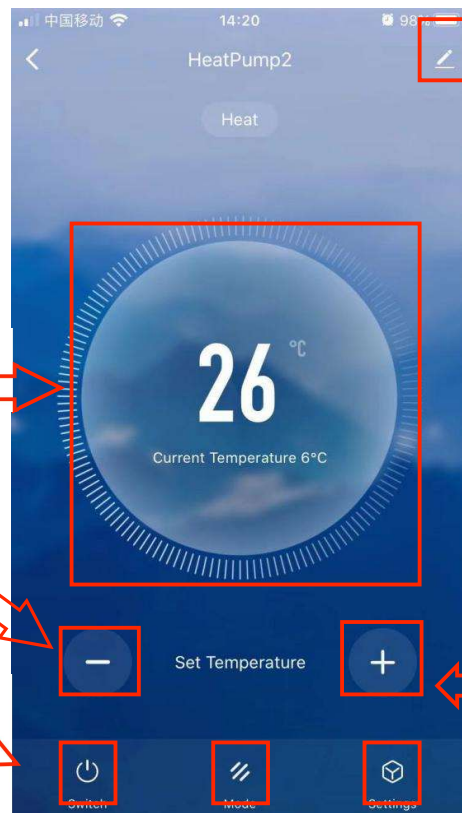

Equipment details

Timing setting, can set the timing on or off

Equipment working mode selection