

ADHESIVE & CONSTRUCTION RECOMMENDATION

FOR CERAMIN®-BASED PRODUCTS IN WET ROOMS

EN/07.26

ATTENTION, IMPORTANT!

The following adhesive recommendation applies to all CERAMIN-based products with a thickness of 3 mm. Currently, this includes the following products:

- CERAMIN Tiles
- CERAMIN Tiles XXL
- Neo Vario
- Neo Vario XXL

This adhesive recommendation does not apply to products with the 'Easy Loc' installation system or to products with integrated sound insulation.

These products are only approved for floating installation. Bonding to the subfloor is therefore not permitted.

We generally recommend the use of low-emission adhesives. If you have any further questions on this topic, please contact the respective adhesive manufacturer.

ADHESIVE RECOMMENDATION

for CERAMIN®-based products

Area	Installation area	Water exposure classification	Ardex	Bona	Bostik	Botament
Non-wet room, normal living area	Floor	inapplicable	AF 180 (SMP), AF 181W (SMP), AF 495 (PU)	R850 (SMP)	Ardaflex Multi	P 450
	Wall		AF 181W (SMP), AF180 (SMP) für XXL			
Wet room	Floor	W0-I	WA (Epoxi), AF 180 (SMP), AF 181 W			
		W1-I				
		W2-I				
	Wall	W0-I	WA (Epoxi), AF 180 (SMP), AF 181 W			
		W1-I				
		W2-I				
		W3-I (only with XXL)	WA (Epoxi), S2K-PU (PU), AF 495 (PU)			

ADHESIVE RECOMMENDATION

for CERAMIN®-based products

Area	Installation area	Water exposure classification	Classen	Forbo	Kiesel	Lugato	Mapei	MEM	METRY-X	Murexin
Non-wet room, normal living area	Floor	inapplicable	MultiConnect / CompoundPro (both SMP)	120 Euroflex MS (SMP)	Bakit PU-P (PU), Bakit HPK (SMP); Both adhesives are currently approved for Ceramin Tiles/Neo Vario only. An extension of the recommendation is in progress.	Fester Boden Design- & PVC-Belagsklebstoff (Dispersion); Fester Boden Alles-In-Einem Belagsklebstoff (Dispersion); Designbelagsklebstoff Doppel Plus (SMP)	Ultrabond ECO 4 LVT (Dispersion); Ultrabond ECO V4SP (Dispersion); Ultrabond ECO MS 4 LVT Wall&Floor	Allground	X-MET Sorbil Multi	MS-K 539; MS-K 499 (both SMP)
	Wall					Designbelagsklebstoff Doppel Plus (SMP)	Ultrabond ECO MS 4 LVT Wall&Floor			
Wet room	Floor	W0-I					Ultrabond Eco Ms 4 LVT Wall&Floor (SMP)		X-MET Sorbil Multi	MS-K 539; MS-K 499 (both SMP)
		W1-I								
		W2-I								
	Wall	W0-I		120 Euroflex MS (SMP)	Bakit PU-P (PU), Bakit HPK (SMP); Both adhesives are currently approved for Ceramin Tiles/Neo Vario only. An extension of the recommendation is in progress.			Allground	X-MET Sorbil Multi	MS-K 539; MS-K 499 (both SMP)
		W1-I								
		W2-I								
		W3-I (only with XXL)								


ADHESIVE RECOMMENDATION

for CERAMIN®-based products

Area	Installation area	Water exposure classification	Otto	Schönox	Sopro	Soudal	Thomsit / PCI	Uzin	Wakol	Wulff
Non-wet room, normal living area	Floor	inapplicable		Protect (SMP), FS (cementitious, plastic-modified)	DesignVinylKleber DVK 1691 (Dispersion), DesignVinylKleber plus DVK 1692 (SMP)	Fix ALL Floor & Wall (SMX-Hybrid Polymer)	K 188 E (Dispersion), K 188 S (Dispersion), K 190 F (Dispersion), P 625, R 710 (both PU); PKL 326 (Dispersion)	KE 60 (Dispersion), KE 68 (SMP), MK 250 (SMP), MK 92 S (PU)	D 3318 (Dispersion), D 3320 (Dispersion), D 3360 (Dispersion), MS 230, MS 260 (both SMP)	Parkettstoff 60 (Update/Extension in progress)
	Wall		Ottocoll M 595 (SMP); Ottocoll S 495 (Cartridge, Silicone)	Protect (SMP), FS (cementitious, plastic-modified), SLK (Cartridge SMP)	DesignVinylKleber plus DVK 1692 (SMP)			KE 68 T (SMP)	MS 230, MS 260 (both SMP)	
Wet room	Floor	W0-I		Schönox Protect (SMP), Schönox FS (cementitious, plastic-modified)	DesignVinylKleber plus DVK 1692 (SMP)			KE 68 (SMP), MK 250 (SMP), MK 92 S (PU)	MS 552 (SMP)	
		W1-I								
		W2-I								
	Wall	W0-I			DesignVinylKleber plus DVK 1692 (SMP)			KE 68 T (SMP)		
		W1-I								
		W2-I								
		W3-I (only with XXL)								

RECOMMENDED USE FOR ROOMS WITH INCREASED EXPOSURE TO MOISTURE

Valid for Ceramin Tiles, Neo Vario - Explanation of the water exposure classification in domestic bathrooms

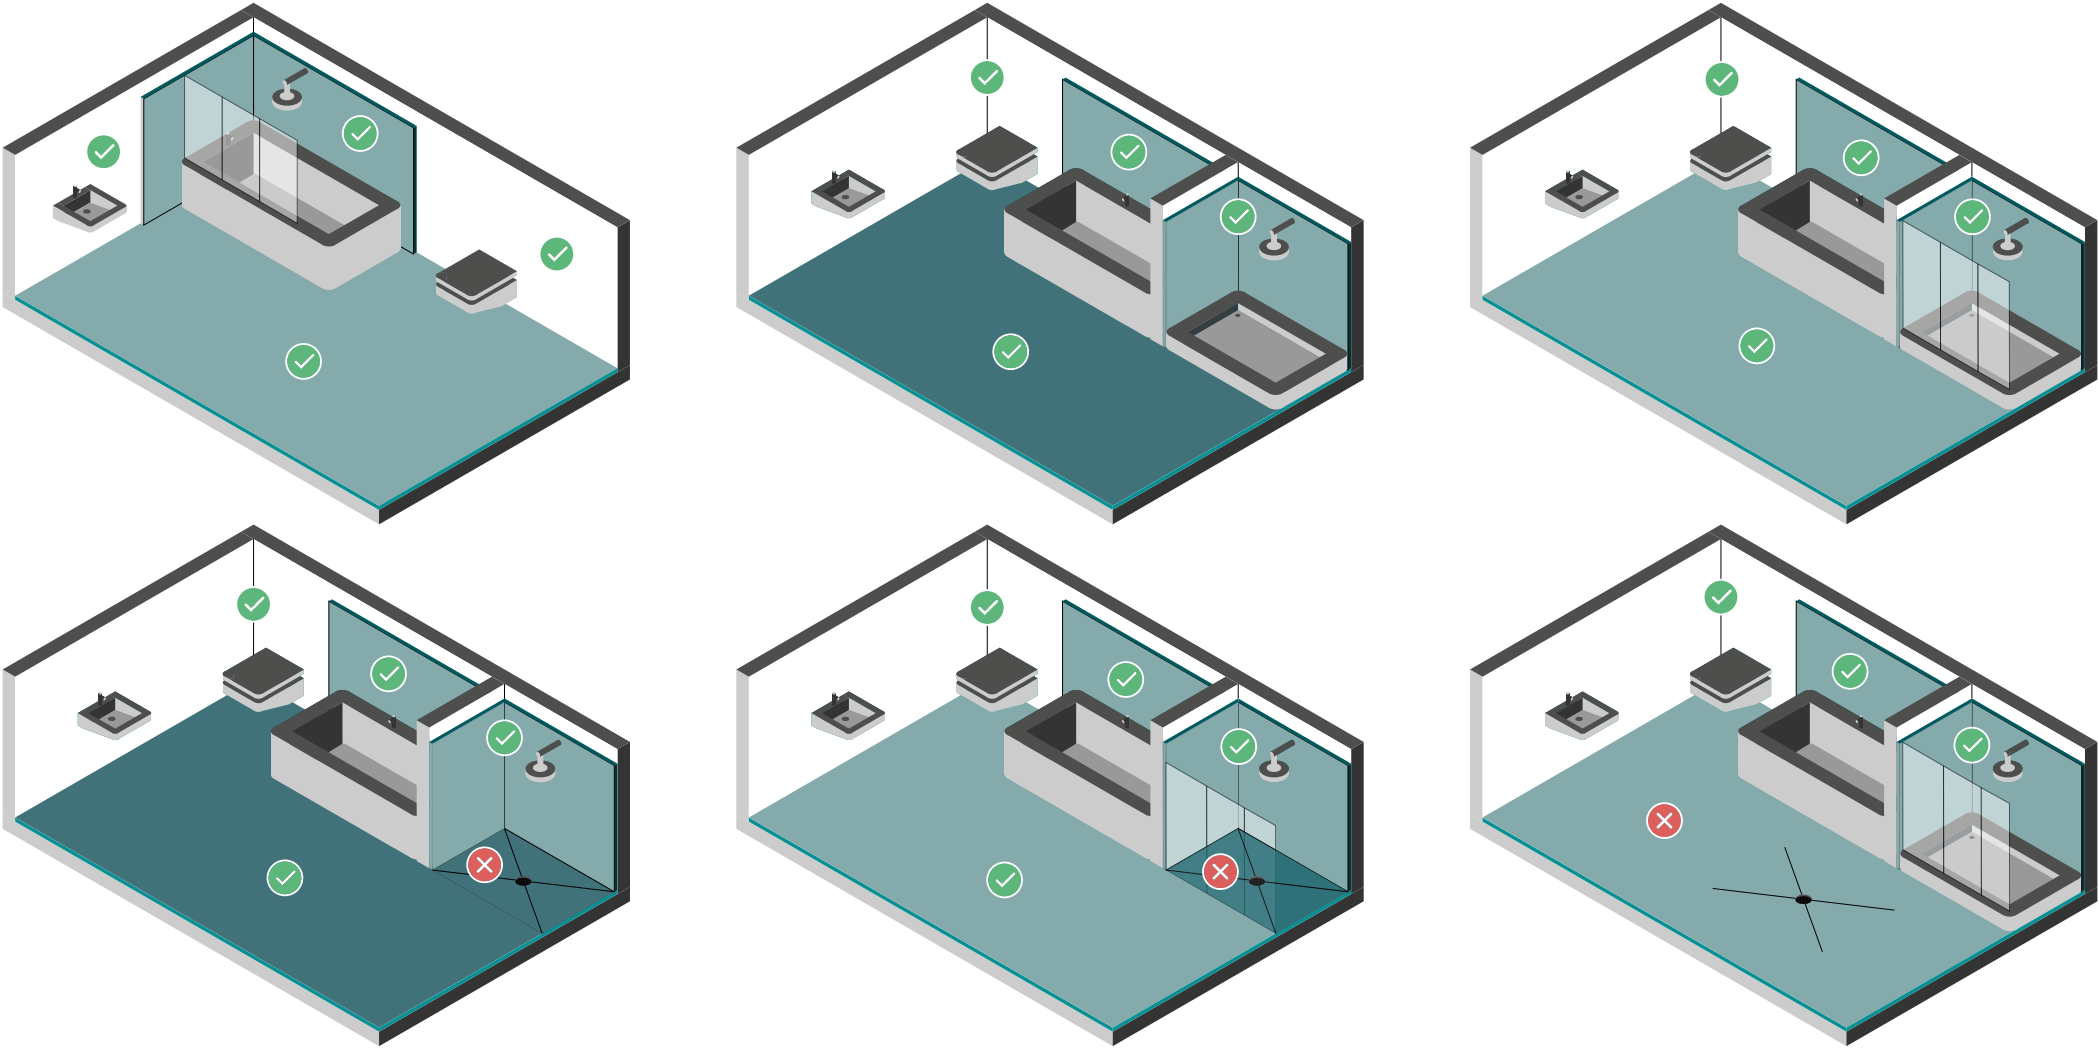


W0-I  W1-I  W2-I 

 Not permitted with CLASSEN products due to ground drainage (drains)

RECOMMENDED USE FOR ROOMS WITH INCREASED EXPOSURE TO MOISTURE

For the product groups Ceramin Tiles XXL, Neo Vario XXL in the domestic area

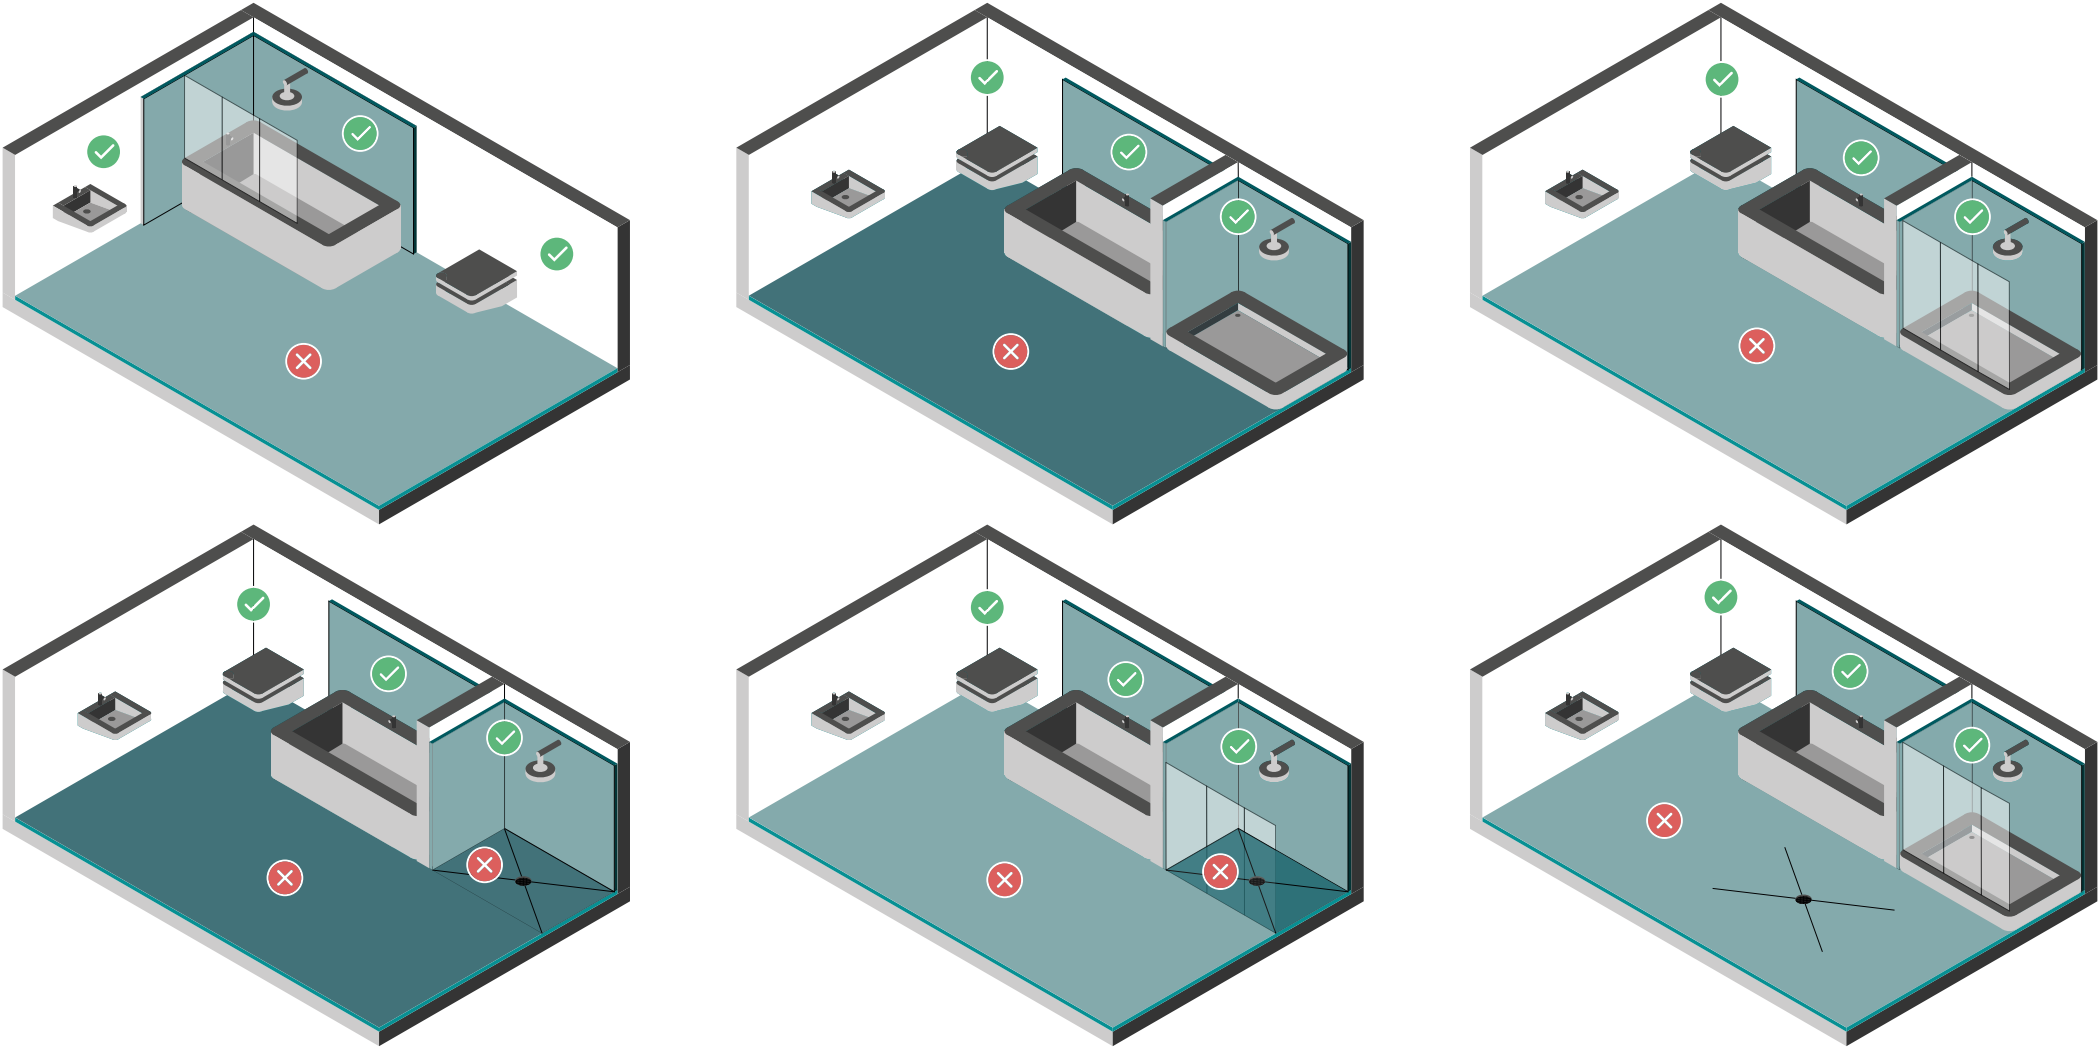


W0-I  W1-I  W2-I 

 Not permitted due to ground drainage (drains) and the unsuitability of XXL products for floor installation.

RECOMMENDED USE FOR ROOMS WITH INCREASED EXPOSURE TO MOISTURE

For the products Ceramin Tiles XXL and Neo Vario XXL.

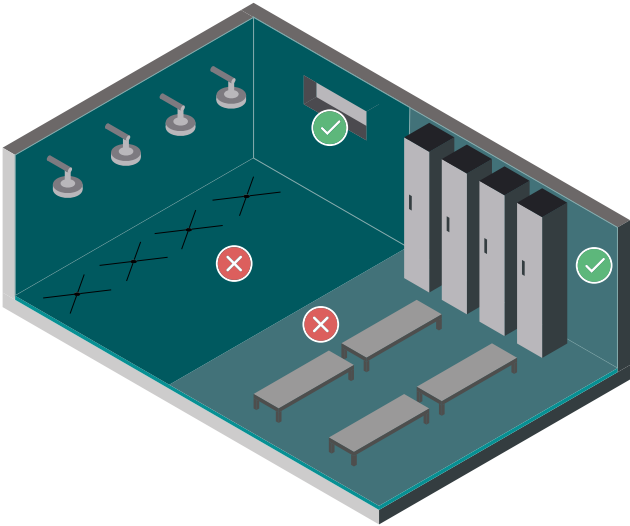

W2-I

W3-I

⊗ Not permitted due to ground drainage (drains) and the unsuitability of XXL products for floor installation.